

Posifill EF

SEMI-AUTOMATIC VOLUMETRIC FILLING MACHINE



Key Benefits

- Simple to operate, clean & maintain
- Fast & accurate filling by volume
- 316 stainless steel contact parts
- FDA approved hoses & seals
- Tool free strip-down for easy cleaning
- Small footprint for simple bench mounting
- Quick release nozzle and feed pipe
- Pneumatic operation suitable for hazardous areas or wash-down facilities
- Future expandability – can be linked together and incorporated into fully automatic machine

Specifications

- Fills liquids, creams and gels
- Available format: 1 head
- Dispensing volumes: 5ml – 1300ml
- Filling speeds: Up to 30 bottles per minute
- Accuracy: +/- 0.5%
- Food and pharmaceutical quality stainless steel contact parts
- ATEX certified for filling flammable liquids & use in hazardous areas


Options & Extras

- Pneumatically operated nozzles for drip free filling
- Short stroke & full diving nozzle for bottom up filling
- Spinning table for cream pots
- Product hoppers & tanks in various sizes (heated versions also available)
- Heating elements & controllers for hot filling applications
- Wide range of hose & seal materials to suit almost any liquid

The Posifill EF is ideally suited for both the first-time user of volumetric dispensers and within a busy production environment which requires flexibility, accuracy and rapid changeovers. Compressed air provides the power supply for filling.

A robustly constructed unit, ideally suited for start-up venture and small-scale or as part of a larger production facility, the Posifill EF offers flexibility, accuracy and rapid changeovers.

Filling speeds of up to 45 containers per minute can be achieved with a wide range of liquids; from solvents to creams and gels, including food and dairy products containing particulates, such as fruit yoghurts, can also be filled by the Posifill EF.

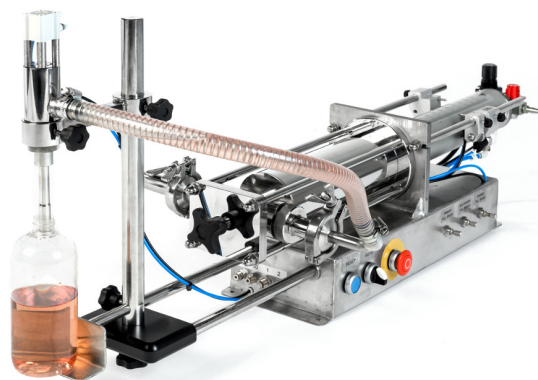

universal
FILLING MACHINE COMPANY

Pound Lane, Kingsnorth, Ashford, Kent TN23 3JE, United Kingdom | Tel: +44 (0)1233 643666 | Email: mail@universalfilling.com